			(A)	(B)	(C)	(D)	(E)	(F)	(G)	(H)	(I)	(J)	(K)	(L)	(M)	(N)
EMBANKMENT ID #	EMBANKMENT DESIGN ELEVATION (FEET)	FENCE LAYOUT TYPE (A, B, OR C)	FENCE SLOPE DISTANCE (FEET)	TOP OF FENCE ELEVATION (FEET)	START STATION (FEET)	END STATION (FEET)	FENCE WIDTH (FEET)	FENCE LENGTH (FEET)	FENCE WIDTH (FEET)	FENCE LENGTH (FEET)	FENCE WIDTH (FEET)	FENCE LENGTH (FEET)	FENCE WIDTH (FEET)	FENCE LENGTH (FEET)	FENCE WIDTH (FEET)	FENCE LENGTH (FEET)

DESIGN TABLE

X-SECTION OF EMBANKMENT WITH RODENT PROTECTION

NOT TO SCALE

UPSTREAM   DOWNSTREAM

BEND FENCE

EXCAVATE TRENCH AS NEEDED TO PROPERLY INSTALL WIRE MESH

CONSTRUCTED EMBANKMENT SURFACE SEE EMBANKMENT DETAIL SHEET

EXISTING GROUND

VARIES

1" X 2" GALVANIZED WELDED WIRE MESH PLACED ON FACE OF VERTICAL TRENCH SEE CONSTRUCTION REQUIREMENT THIS SHEET

TOP OF FENCE LOCATION

NOT TO SCALE

UPSTREAM

TOP OF EMBANKMENT

1" X 2" GALVANIZED WELDED WIRE MESH PLACED ON FACE OF VERTICAL TRENCH SEE CONSTRUCTION REQUIREMENT THIS SHEET

TYPE A

TYPE B

TYPE C

FENCE LAYOUTS FOR RODENT PROTECTION

NOT TO SCALE

CONSTRUCTION REQUIREMENTS

RODENT PROTECTION:
• RODENT FENCE SHALL BE ADEQUATELY SECURED WITH ANCHORS AT THE TOP EDGE (APPROXIMATELY 6" DOWN FROM FENCE TOP ELEVATION) AND ALONG ALL OVERLAPS TO HOLD FENCE IN PLACE PRIOR TO AND DURING BACKFILLING AND TOPSOILING.

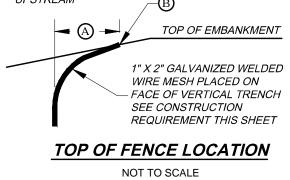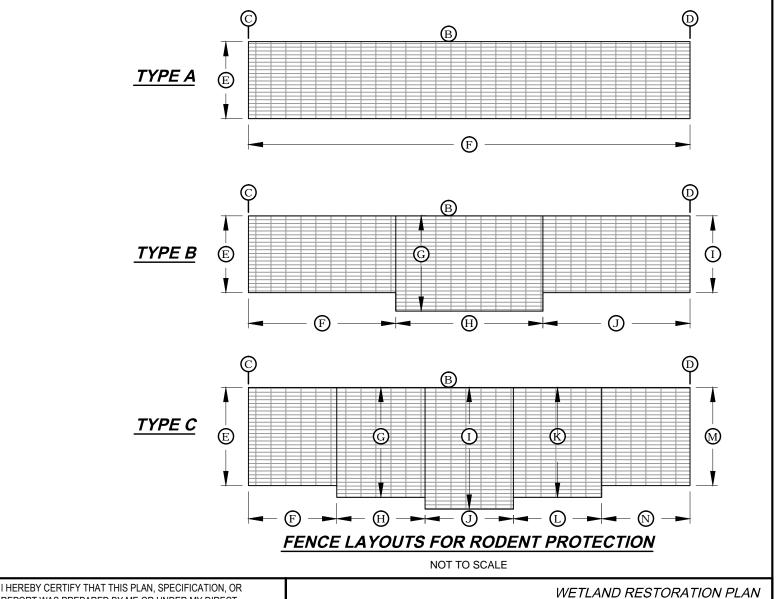• ANCHORS SHALL BE PLACED 4 FOOT ON CENTER (UNLESS OTHERWISE DIRECTED) ALONG LENGTH OF FENCE MATERIAL AND 1 FOOT ON CENTER VERTICALLY ALONG ANY FENCE OVERLAPS.

• ALL FENCE OVERLAPS SHALL BE 1 FOOT.

MATERIALS:
• **14 GAUGE** GALVANIZED "WELDED WIRE MESH" FENCE MATERIAL WITH A MAXIMUM OPENING SIZE OF **1" X 2" INCH RECTANGLE**. SEE SPECIFICATION FOR ADDITIONAL REQUIREMENTS.

• ANCHORS SHALL BE "U" SHAPED WITH A MINIMUM LENGTH OF 8".

WETLAND RESTORATION PLAN

RODENT PROTECTION DETAIL SHEET

APPROVED BY: DATE :

PROJECT # :

COUNTY :

PLAN SHEET   OF

STANDARD SHEET # **BWSR-103B**

BWSR